


MEZZO GRADIENT

ecoBACK

CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufted 1/12" Loop Tufté 1/12" Bouclé Getuftet 1/12" Schlinge Getuft 1/12" Luspool	FIRE RESISTANCE COMPOTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 B _s -s1
PILE MATERIAL COUCHE D'USURE POLMATERIAL POOLMATERIAAL	100% ECONYL® yarn 100% regenerated solution dyed nylon	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	ISO 105-B02 ≥ 7
SECONDARY BACKING DOSSIER RÜCKENAUSSTATTUNG RUG	ecoBack: fully recyclable polyolefin based carpet tile backing with minimum 75% post-industrial recycled content	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 3.800 g/m² Ca. 112,1 oz./yd²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca. 660 g/m² Ca. 19,5 oz./yd²	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLABWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0,077 m²K/W
PILE ABOVE BACKING POIDS DE VELOURS UTILE POLNUTZSCHICHTGEWICHT NUTTIG POOLGEWICHT	Ca. 450 g/m² Ca. 13,3 oz./yd²	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNGMAß GELUIDSISOLATIE	ISO 10140 ΔL _w : ca 26 dB
TOTAL HEIGHT ÉPAISSEUR TOTALE GESAMTDICKE TOTAAL DIKTE	Ca. 7,2 mm Ca. 0,28"	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 α _w : 0,20
PILE HEIGHT ÉPAISSEUR DU VELOURS POLDICKE POOLHOOGTE	Ca. 3,5 mm Ca. 0,14"	PERMANENT ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 ≤ 2 kV
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHT POOLDICHTHEID	Ca. 0,129 g/cm³ Ca. 3.479 oz./yd³	TRANSVERSAL RESISTANCE RÉSISTANCE TRANSVERSALE DURCHGANGSWIDERSTAND DOORGANGSWEERSTAND	ISO/DIS 10965 ≤ 1 x 10 ⁹ Ohm
TUFT DENSITY NOMBRE DE TOUFFES NOPPENZAHL AANTAL PUNTEN	Ca. 220.000 /m² Ca. 183.946 /yd²	SIZE & PACKING DIMENSION & EMBALLAGE ABMESSUNG & VERPACKUNG AFMETINGEN & VERPAKKING	50 cm x 50 cm box: 5m² pallet: 20 boxes
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 33- LC2	NUMBER OF COLOURS NOMBRE DE COLORIS ANZAHL DER FARBEN AANTAL KLEUREN	16
CASTOR CHAIR SUITABILITY EMPLOI CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	ISO 4918 A : continuous use	DIMENSIONAL STABILITY STABILITÉ DIMENSIONNELLE DIMENSIONSTABILITÄT DIMENSIONELE STABILITEIT	EN 986 max. 0,2 %
CRADLE TO CRADLE CERTIFIED®	Gold level according to version 4.0 10, 12, 208, 398, 501, 518, 626, 853, 901, 904, 911, 932, 983 Silver level according to version 4.0 389, 659, 672	GUT-NR	ACBF3E3E
		LEED®	Product contributes toward satisfying Credits under LEED®.*
		DGNB	modulyss is member of DGNB, the German Sustainable Building Council.

* For more information, see the modulyss sustainable datasheets. - Remark: Products are not reviewed under LEED®, LEED® credit requirements cover the performance of materials in aggregate, not the performance of individual products of brands. The LEED® green building certification program is the nationally accepted benchmark for the design, construction, and operation of green buildings. For more information on LEED®, visit www.usgbc.org/contact.

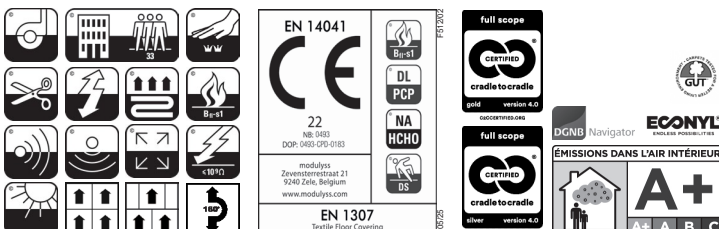

We reserve all rights for technical improvements | Technische wijzigingen, ter verbetering van het product, worden voorbehouden | Sous réserve de toute modification technique visant à l'amélioration constante de nos produits | Durch technische Weiterentwicklung sind bedingte Änderungen vorbehalten

modulyss®